


ADD POWER FEED TO ATLAS 3 RAIL TRACK



- 1 IDENTIFY RAIL WHERE POWER IS NOT DETECTED
- 2 CHOOSE REPLACEMENT WIRE
- 3 DRILL APPROPRIATE SIZE HOLE
 - 5/64" FOR 16 GA WIRE STRANDED ONLY
 - 1/16" FOR 18-20 GA WIRE STRANDED ONLY

USE UP TO 16 GA. STRANDED WIRE. STRIP INSULATION APPROX 1/4" TIGHTEN ENDS AND SLIDE INTO PRE DRILLED 5/64" HOLE. USE MICRO-FASTENERS PART# SMPPK0004 1/4" NUMBER 0 PANHEAD SCREW. PUSH SCREW IN ALONGSIDE OF POWER WIRE AND TIGHTEN.

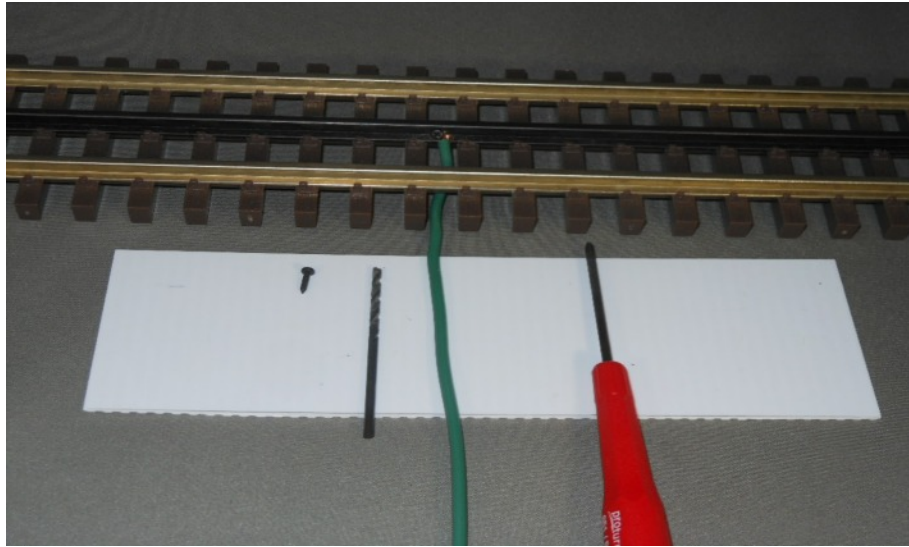